

EXTRACTOR COFFEE BREWER

CBS 2030 Series

CBS-2032e

Twin 1 Gallon Brewer



The CBS-2032e is still as versatile and reliable as the 2031e, but with twice the brewing power. These units are perfect for small- to medium-sized operations. It comes standard with our patented Cascading Spray Dome™, which helps deliver a consistent, perfectly balanced cup of coffee every time. You can use the lightweight, portable airtots or our LUXUS® Thermal Servers to keep coffee hot for hours.

Brewer shown with the 1.0 Gallon LUXUS® Thermal Server (L3S-10). The 3.0 Liter Stainless Steel Lined Lever Airtot and the 1.9 Liter Stainless Steel Lined Server are also available. All are sold separately.



Cascading Spray Dome™ technology ensures perfect extraction of coffee flavor.

Pulse-Brew System delivers intermittent pulses of water to ensure even saturation of the coffee bed for enhanced extraction.



Digital Interface makes it easy to program and run brewer. Settings can be customized to your recipe.

Pre-Wet Cycle allows you to control the length of time water is in contact with the coffee before the brew cycle to ensure optimum flavor.



Bypass Feature redirects water directly into the dispenser, bypassing the coffee grounds in the brew basket, to provide your custom water-to-coffee ratio.

Brew Time & Brew Volume can be programmed separately to ensure a perfectly-balanced batch, no matter how much coffee you brew at once.



Drip Delay lets you set the time between the end of the brew cycle and the unlocking of the brew basket, for increased safety.

FETCO
DRIVEN TO INNOVATION

Water Specification

Water Inlet 3/8 inch Male Flare	Minimum Flow Rate 1/2 gpm [1.9 lpm]	Water Pressure 20-75 psig [139-517 kPa]
------------------------------------	--	--

Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon[Liter]/Hour
DOMESTIC & CANADA E32015	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Hardwired	22.4-25.8	11.5-15.4 [43.7-58.5] ⁽¹⁾
EXPORT E32035	2 x 3.0 kW	220-240	1	3+G	5.1-6.1	Hardwired	23.7-25.8	12.9-15.4 [49.0-58.5] ⁽¹⁾


Important

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.


Measurements

Height 26 1/8 in [66.4 cm]	Width 19 in [48.3 cm]	Depth 17 7/8 in [45.4 cm]	Empty Weight 49 lbs [22.2 kg]	Filled Weight 94 lbs [42.7 kg]	Shipping Weight 60 lbs [27.2 kg]
-------------------------------	--------------------------	------------------------------	----------------------------------	-----------------------------------	-------------------------------------

SIDE VIEW

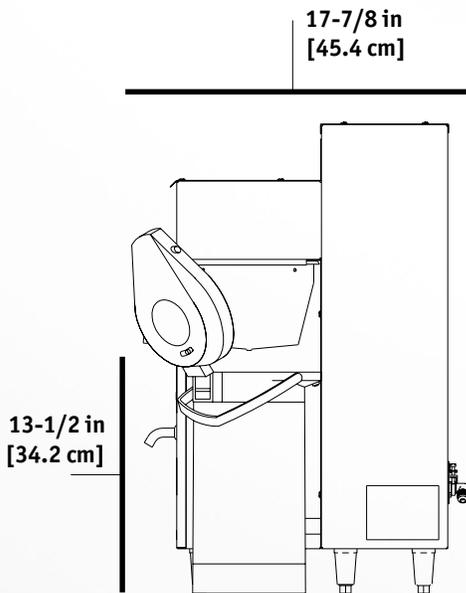

FRONT VIEW

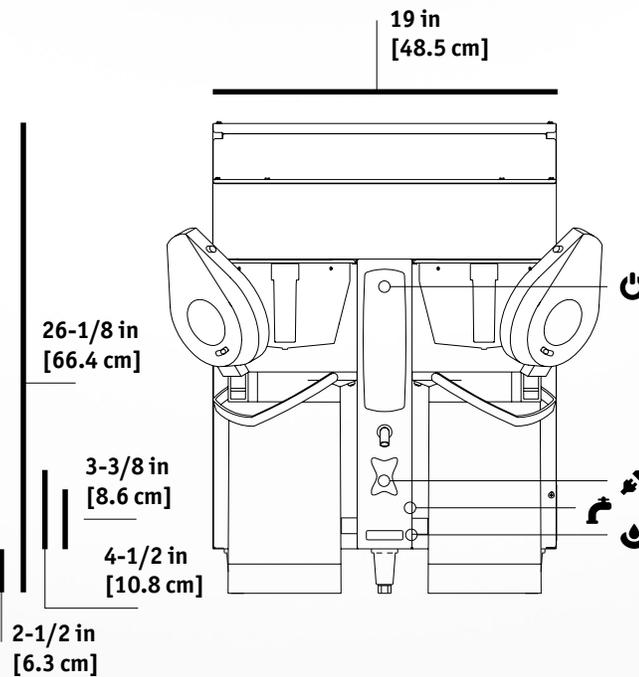

SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet

DISPENSERS

Brewer can be used with:

L3S-10 Thermal Dispenser with Serving Station L3S-10

1.9 Liter Stainless Steel Lined Server

3.0 Liter Stainless Steel Lined Lever Airpot



FETCO® is an active member of



Information

www.fetco.com

+1 847.719.3000
1.800.338.2699 USA
+1 847.719.3001

Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA