

EXTRACTOR COFFEE BREWER

CBS-2052e

Twin 1.5 Gallon Brewer



CBS 2050 Series

The CBS-2052e twin brewer is easy to program and simple to operate. This unit comes standard with our patented Cascading Spray Dome™, which helps deliver a consistent, perfectly balanced cup of coffee every time. The pulse-brew intermittent shower brewing system lets you control the length of time the water is in contact with the ground coffee for optimal extraction according to your recipe.

Shown with 1.5 gallon LUXUS® Thermal Dispenser (L3D-15).
The 1.5 Gallon LUXUS® Thermal Server (L3S-15) and the 1.5 Gallon LUXUS® Thermal Dispenser (TPD-15) are available and sold separately.



Cascading Spray Dome™ technology ensures perfect extraction of coffee flavor.

Pulse-Brew System delivers intermittent pulses of water to ensure even saturation of the coffee bed for enhanced extraction.



Digital Interface makes it easy to program and run brewer. Settings can be customized to your recipe.

Pre-Wet Cycle allows you to control the length of time water is in contact with the coffee before the brew cycle to ensure optimum flavor.



Bypass Feature redirects water directly into the dispenser, bypassing the coffee grounds in the brew basket, to provide your custom water-to-coffee ratio.

Brew Time & Brew Volume can be programmed separately to ensure a perfectly-balanced batch, no matter how much coffee you brew at once.



Drip Delay lets you set the time between the end of the brew cycle and the unlocking of the brew basket, for increased safety.

FETCO
DRIVEN TO INNOVATION



Water Specification

Water Inlet
3/8 inch Male Flare

Minimum Flow Rate
3 gpm [11.3 lpm]

Water Pressure
20-75 psig [139-517 kPa]



Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon[Liter]/Hour
DOMESTIC & CANADA								
E52016	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Hardwired	22.4-25.8	11.5-15.5 [43.7-58.9] ⁽¹⁾
	3 x 3.0 kW	120/208-240	3	4+G	6.9-9.1	Hardwired	19.5-22.5	17.4-23.0 [65.9-87.0] ⁽¹⁾
E52026	2 x 5.0 kW	120/208-240	1	3+G	7.6-10.1	Hardwired	36.9-42.5	19.3-25.7 [73.1-97.3] ⁽¹⁾
	3 x 5.0 kW	120/208-240	3	4+G	11.4-15.1	Hardwired	32.0-36.9	29.0-38.4 [109.4-145.3] ⁽¹⁾
EXPORT								
E52036	2 x 3.0 kW	220-240	1	2+G	5.1-6.1	Hardwired	23.7-25.8	13.4-15.5 [50.9-58.9] ⁽¹⁾



Important

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.



Measurements

Height
37 1/4 in [94.6 cm]

Width
21 7/8 in [55.6 cm]


Depth
20 1/8 in [51.1 cm]

Empty Weight
84 lbs [38.1 kg]


Filled Weight
181 lbs [82.0 kg]

Shipping Weight
92 lbs [47.1 kg]

SIDE VIEW

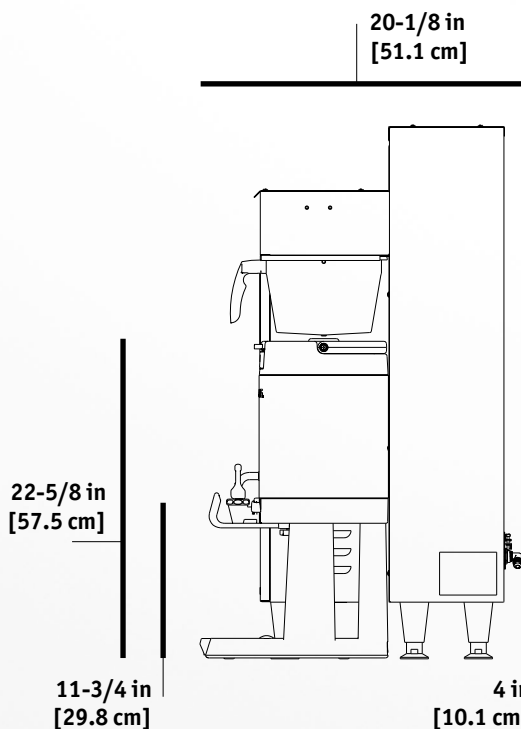

FRONT VIEW

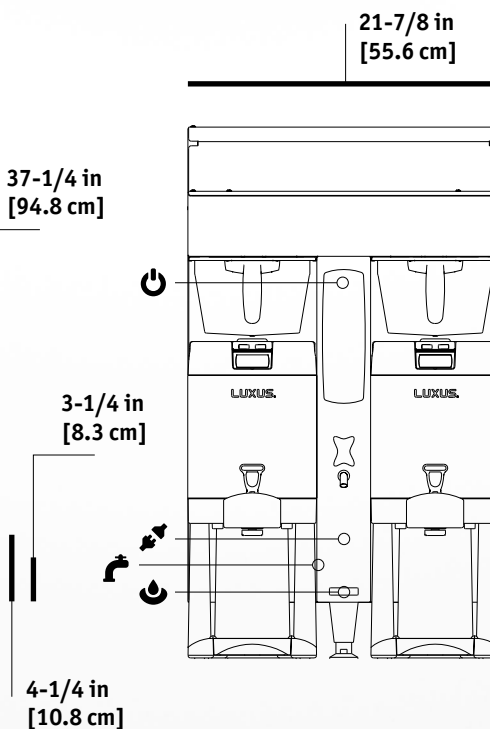

SYMBOLS

Electrical Connector

On / Off Switch

Tank Drain

Water Inlet

DISPENSERS

Brewer can be used with:

L3S-15 Thermal Dispenser with Serving Station L3S-15-20

L3D-15 Thermal Dispenser

TPD-15 Thermal Dispenser



FETCO® is an active member of



Information



www.fetco.com



+1 847.719.3000
1.800.338.2699 USA



+1 847.719.3001



Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA