



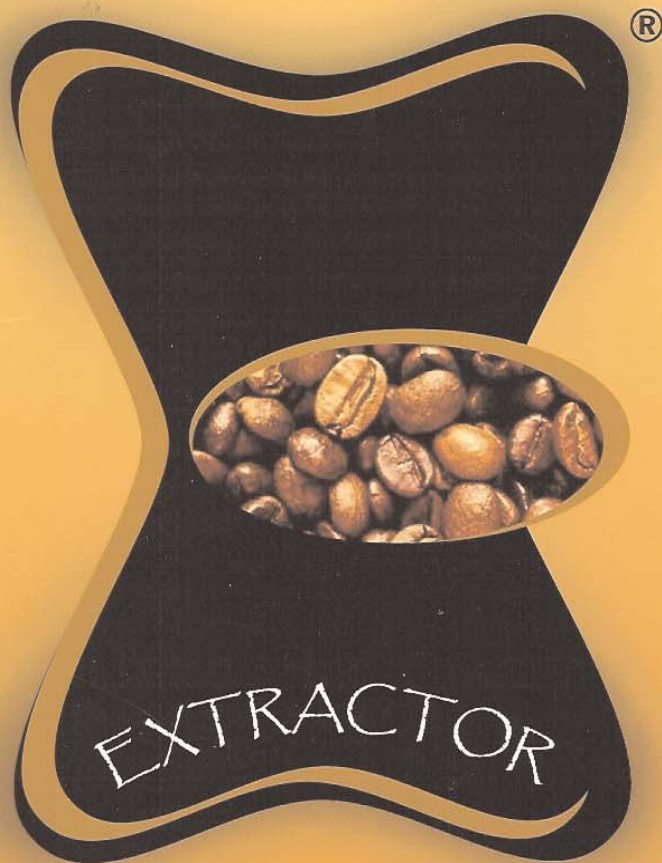

EXTRACTOR

The Science of Extraction
Meets The Art of Taste™

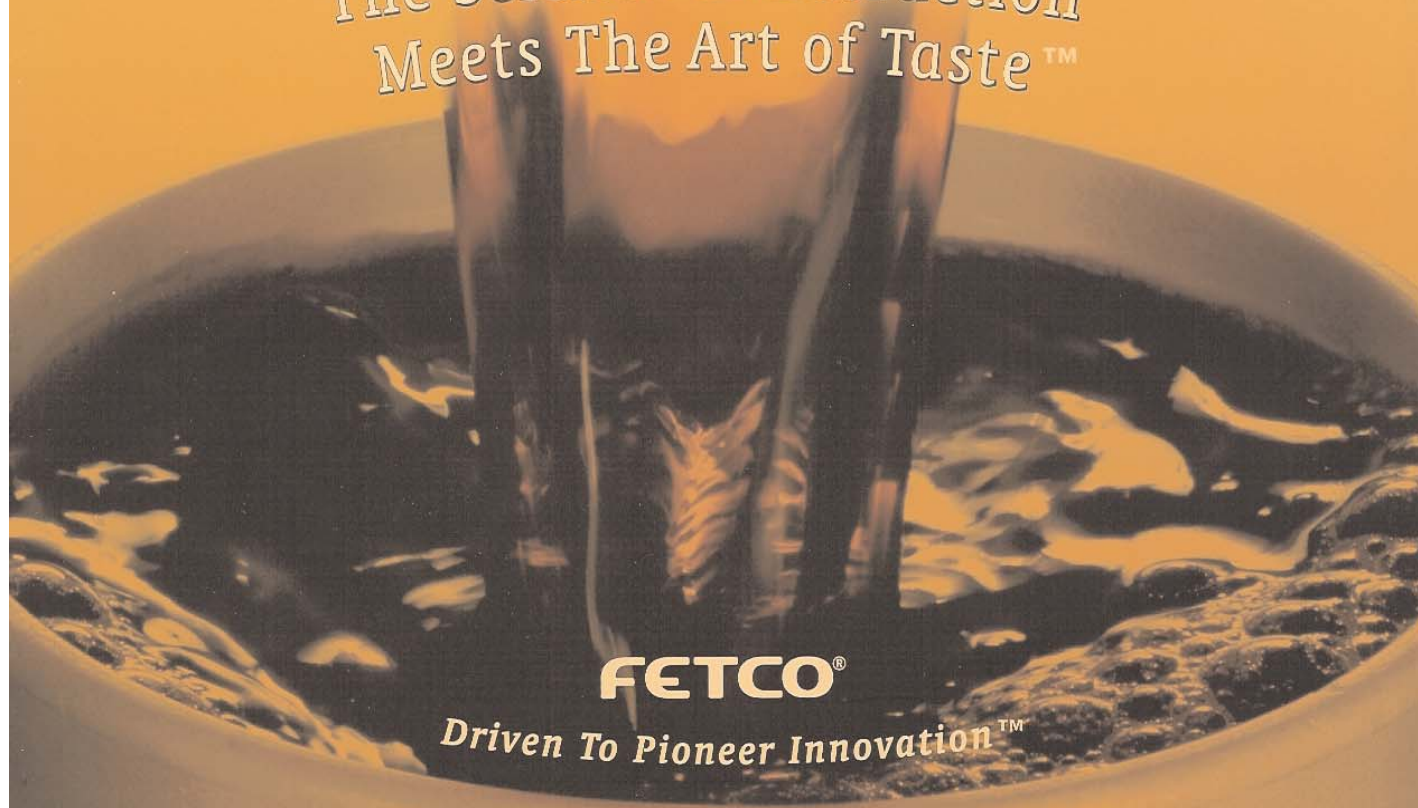

FETCO®

Driven To Pioneer Innovation™

The Science of Extraction Meets The Art of Taste™

Never before has there been a coffee brewer that has been more dedicated to the art and science of extracting the perfect cup of coffee. Nor has there ever been a coffee brewer so advanced yet so easy to operate. Without a doubt, The Extractor® Coffee Brewers are the smartest brewers in its class yet it won't intimidate the operator.


Science of Extraction

The best cups of coffee have an optimum balance of strength and extraction. Designed to achieve the optimal saturation, this brewer incorporates an innovative large spray disc, together with our renowned brew basket.



Pulse-Brew™ Brewing System

Pulse-Brew™ Brewing gives you the confidence that you will have an even and full saturation of your coffee bed. You decide whether to select a continuous shower or intermittent surges of water for your roasts. After all, who knows your coffee better than you?

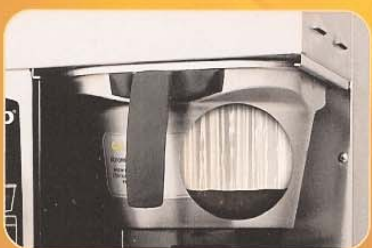

Outstanding Safety Operation

The brew basket locks into place during the entire brew cycle (including spray-over and dwell times) for added operator safety (on select models). The Low-Temp / No-Brew feature, if activated, stops brewing with tepid water. Batch sizes and hot water service features can be turned on or off during setup to streamline operator choices.


Innovative Features

The Extractor® Coffee Brewers incorporate such features as a Pre-Wetting Cycle which can be turned on or off to assure thorough extraction of freshly-roasted coffees, as well, as maintaining correct temperature throughout the entire brew cycle. Now with Pulse-Brew™ Brewing (intermittent spray shower), Contact Time can be changed for each batch size to maintain a consistent taste profile.



Effortless Calibration

Have you ever wished you had more time and energy to fine-tune your coffee brewer, but didn't want to go under the lid? Now you don't have to with The Extractor® Coffee Brewers. Effortless external calibration and set-up are made easy through innovative front panel technology. Only what you need to know appears on the panel, and just the selected options you choose remain activated.

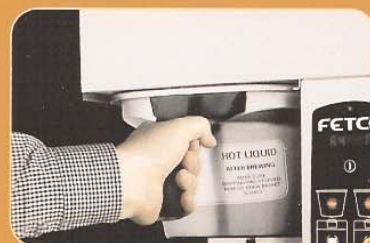

Pulse-Brew™ System

The spray disc dispenses brew water over the coffee bed for a precise amount of time and then turns off. By controlling the amount of time the water stays in contact with the ground coffee, gives one the perfect extraction in the cup.

Operator Interface

The Technician may only interact with the brewer a couple times a year, but it's the Operator who interacts with the brewer several times a day. The newly designed control panel is well lighted and easy to identify reducing training time from days to minutes.


Hot Water

Electronically controlled hot water faucet with adjustable temperature. The hot water faucet can be turned on, off or disabled only during the brew cycle.

Adjustable Parameters

- ▶ Brew Volume
- ▶ Brew Time
- ▶ Bypass Percent
- ▶ Pre-Wet Percent
- ▶ Drip Delay
(Brew Basket Locks)
- ▶ Brew Temperature
- ▶ Low Temp / No Brew

Calibration Panel

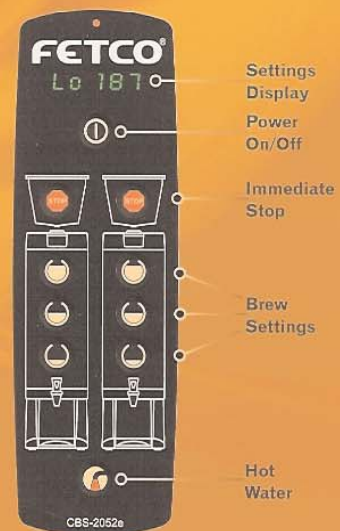

Smallest batch sizes turned off.



The right side limited to one batch brewing.



Hot water service feature turned off.



1.5 Gallon Brewers

Brewing directly into our Luxus® Thermal Dispensers ensures a continuous flow of hot, aromatic, great tasting coffee. LUXUS® Thermal Dispensers are totally portable and require no electric power to maintain serving temperatures.



CBS-2051



CBS-2052



CBS-2052 WITH 2x L3D15
1.5 GALLON LUXUS®
THERMAL DISPENSERS



TPD1.5 GALLON LUXUS®
THERMAL DISPENSERS

L3D1.5 GALLON LUXUS®
THERMAL DISPENSERS



LD1.5 GALLON LUXUS®
THERMAL DISPENSERS

1.0 Gallon Brewers

Thermal Dispensers remove the hazards of utilizing glass-lined products without the loss of performance, while adding the durability of stainless steel.



CBS-2041

CBS-2042



CBS-2042 WITH 2x L3D10
1.0 GALLON LUXUS®
THERMAL DISPENSERS



L3D1.0 GALLON LUXUS®
THERMAL DISPENSERS



L3D10 1.0 GALLON
LUXUS® THERMAL
DISPENSERS

The Ultimate in Airpot Technology

Versatility, reliability, portability and functionality best describes these 3.0 Liter all stainless steel lined beverage dispensers. Once filled, they can be taken anywhere to provide self serve beverage service. Indoors, outdoors, on different floors, these dispensers can be placed throughout the restaurant, hotel or office for hours of reliable performance.



CBS-2031



CBS-2032

CBS-2032 WITH 2x 3.0 LITER
STAINLESS STEEL LINED LEVER AIRPOTS



D041 3.0 LITER
STAINLESS LEVER
AIRPOT

L3S10 1.0 GALLON
LUXUS® THERMAL
DISPENSERS



S3S-10-1 SINGLE SERVING STATION
WITH L3S-10 LUXUS® THERMAL DISPENSER

The Versatility in 1/2 Gallon Servers

Easy to pour, lightweight and stylish best describes these 1/2 gallon stainless steel or glass lined beverage servers. Once filled, they can be taken anywhere to provide easy pour beverage service.

**CBS-2018 WITH
1.8 LITER GLASS LINED SERVER**

**D029 1.5 LITER
GLASS SERVER**

**D030 1.8 LITER
GLASS SERVER**

**CBS-2018 WITH
D037 1.9 LITER
STAINLESS TALL SERVER**

**D055 1.9 LITER
STAINLESS BOWL SERVER
ON EXTENSION STAND**


**D055 1.9 LITER
STAINLESS BOWL
SERVER**




CBS-2051 CBS-2052

Drawing

CBS-2051e WITH L3D15

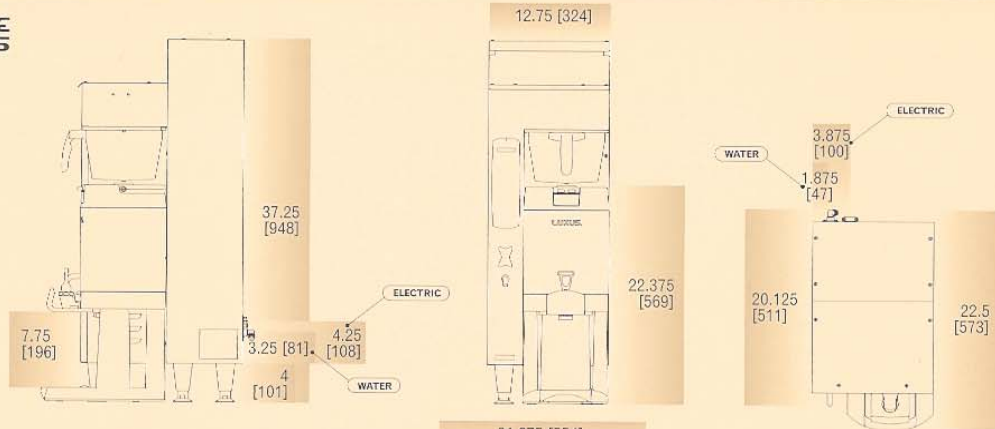

CBS-2052e WITH L3D15

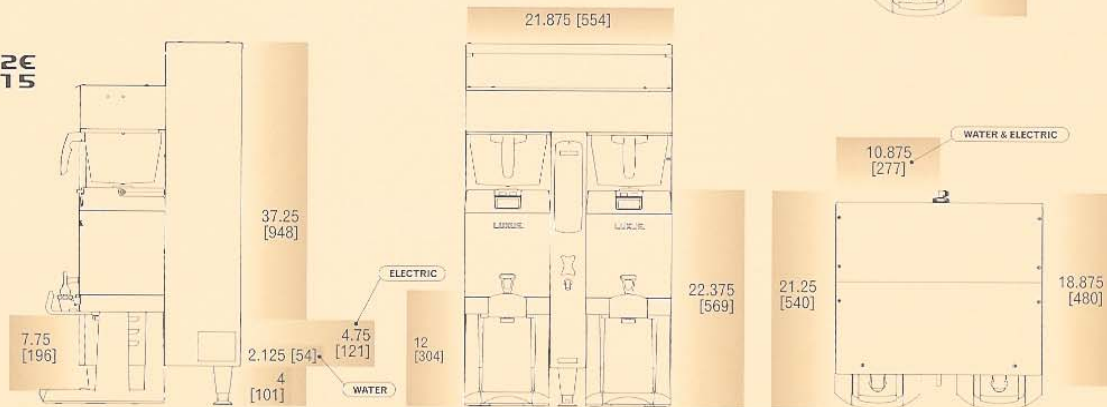

Electrical Configurations

Model	Configuration Code	Heater Conf. WATT	Voltage AC	Phase	Wires	KW	Maximum Amp. Draw	Batches per hour ⁽¹⁾ 1.5 Gallon per Batch	
Cold WaterHot Water									
U S & C A N A D A									
2051e	E51016	2 x 3000	120/208	1	3+ground	4.6	22.1	7,7	11.0
			120/220			5.1	23.4	8.9	11.0
			120/240			6.1	25.5	10.3	11.0
2052e	E52016 Universal Wiring Total 3x3 KW Heaters	OPTION 1: 2 x 3000 (Factory Settings)	120/208	1	3+ground	4.6	22.4	7.7	18.6
			120/220			5.1	23.7	8.9	21.6
			120/240			6.1	25.8	10.3	22.0
		OPTION 2: 3 x 3000	120/208	3	4+ground	6.9	19.5	11.5	22.0
			120/220			7.7	20.6	13.4	22.0
			120/240			9.1	22.5	15.4	22.0
	E52026 Universal Wiring Total 3x5 KW Heaters	OPTION 1: 2 x 5000	120/208	1	3+ground	7.6	36.9	12.8	22.0
			120/220			8.5	39.0	14.9	22.0
			120/240			10.1	42.5	17.1	22.0
		OPTION 2: 3 x 5000 (Factory Setting)	120/208	3	4+ground	11.4	32.0	19.2	22.0
			120/220			12.7	33.9	22.0	22.0
			120/240			15.1	36.9	22.0	22.0
E X P O R T									
2051e	E51026	2 x 3000	220	1	2+ground	5.1	23.4	8.9	11.0
2052e	E52036	2 x 3000	220	1	2+ground	5.1	23.7	8.9	21.6
1. Based on standard factory settings: 4.0 minute brew time, 0% prewet, 200°F water.									

1. Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.

Optional Features

Z005 ▶ Color Coded Faucet Handles
Paper Filters

F001 ▶ 15" x 5" Paper Filters
(500 Per Case)

Accessories

- A010** ▶ Airpot Brewer Stand 9" (BS-2)
- A015** ▶ Round Drip Tray
- A039** ▶ In Line Water Filter w/Cartridge
- A075** ▶ Replacement Filter Cartridge
- A104** ▶ Iced Tea Brew Basket 16" x 6"
- A069** ▶ Identifier Plates, Acrylic

Patents

6,148,717 & 6,565,906 & 6,576,282

Other patents pending.

Approvals



Specifications / Water Configurations



Model	Height inch [mm]	Width inch [mm]	Depth inch [mm]	Brewer Empty lbs [kg]	Water Pressure psig	Flow Rate gpm	Water Inlet inch	Weight lbs [kg]	Height inch [mm]	Width inch [mm]	Depth inch [mm]
2051e	37.3 [945]	12.8 [320]	22.5 [570]	55.1 [25]	20-75	1	3/8 male	66 [30]	35 [875]	14 [350]	23 [575]
2052e	37.3 [945]	21.8 [550]	22.5 [570]	92.6 [42]	20-75	1.5	3/8 male	100 [45]	35 [875]	23 [585]	23 [575]

Shipping




CBS-2041 CBS-2042

Drawing

CBS-2041E WITH L3D10

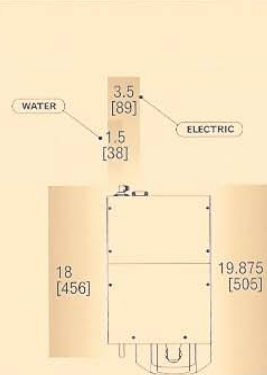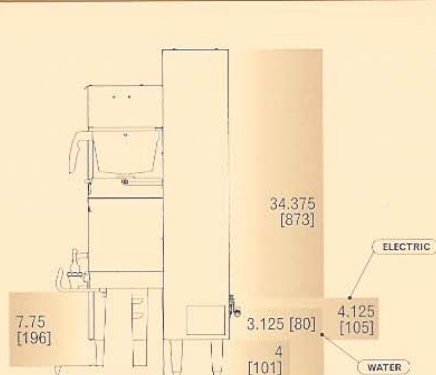

CBS-2042E WITH L3D10

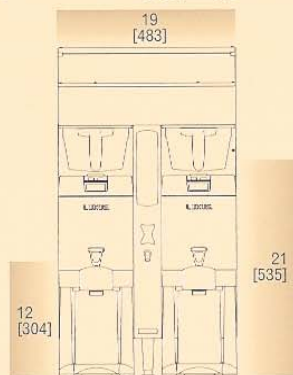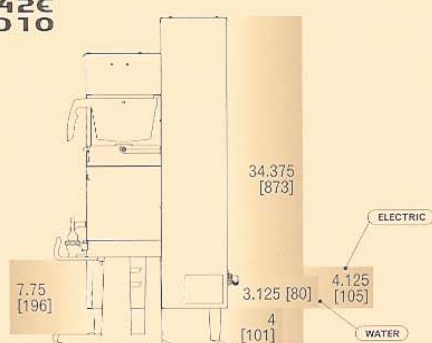

Electrical Configurations

Model	Configuration Code	Heater Conf. WATT	Voltage AC	Phase	Wires	KW	Maximum Amp. Draw	Batches per hour ⁽¹⁾ 1 Gallon per Batch	Cold Water	Hot Water
US & CANADA										
2041e	E41046 Can be connected to 120 VAC or 120/208-240 VAC	1 x 1500	120	1	2+ground	1.6	13.0	3.8	9.3	
		2 x 1500	120/208	1	3+ground	2.4	11.3	5.8	11.0	
			120/220			2.6	12.0	6.5	11.0	
			120/240			3.1	13.0	7.7	11.0	
	E41036 Can be connected to 120 VAC or 120/208-240 VAC	1 x 1700	120	1	2+ground	1.8	14.7	4.4	9.3	
		2 x 1700	120/208	1	3+ground	2.7	12.8	6.5	11.0	
			120/220			3.0	13.5	7.3	11.0	
			120/240			3.5	14.7	8.7	11.0	
	E41016 Can be connected to 120 VAC or 120/208-240 VAC	1 x 2300	120	1	2+ground	2.4	19.7	5.8	9.3	
		2 x 2300	120/208	1	3+ground	3.6	17.1	8.9	11.0	
			120/220			4.1	18.1	9.9	11.0	
			120/240			4.7	19.7	11.0	11.0	
2042e	E42016	2 x 3000	120/208	1	3+ground	4.6	22.4	11.5	22.0	
			120/220			5.1	23.7	12.9	22.0	
			120/240			6.1	25.8	15.4	22.0	

EXPORT

2041e	E41026	1 x 3000	220	1	2+ground	2.6	12.0	6.5	11.0	
2042e	E42026	2 x 3000	220	1	2+ground	5.1	23.7	12.9	22.0	

¹ Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.

Specifications / Water Configurations

Model	Height inch [mm]	Width inch [mm]	Depth inch [mm]	Brewer Empty lbs [kg]	Water Pressure psig	Flow Rate gpm	Water Inlet inch	Weight lbs [kg]	Height inch [mm]	Width inch [mm]	Depth inch [mm]
CBS-2041	34.4 [875]	11 [280]	19.9 [505]	46.2 [21]	20-75	1	3/8 male	66 [30]	35 [875]	14 [350]	23 [575]
CBS-2042	34.4 [875]	19 [480]	19.9 [505]	63.9 [29]	20-75	1.5	3/8 male	100 [45]	35 [875]	23 [575]	23 [575]

Shipping

Optional Features

Z005 ▶ Color Coded Faucet Handles

Paper Filters

F002 ▶ 13" x 5" Paper Filters
(500 Per Case)

Accessories

A039 ▶ In Line Water Filter w/Cartridge
A075 ▶ Replacement Filter Cartridge
A103 ▶ Iced Tea Brew Basket 13" x 5"

Patents

6,148,717 & 6,565,906 & 6,576,282

Other patents pending.




Approvals






CBS-2031 CBS-2032

Drawing

CBS-2031E WITH D041

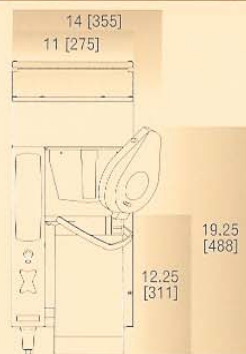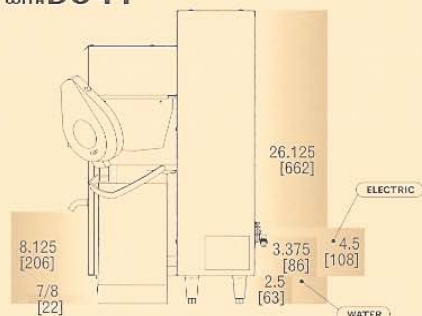

CBS-2032E WITH D041

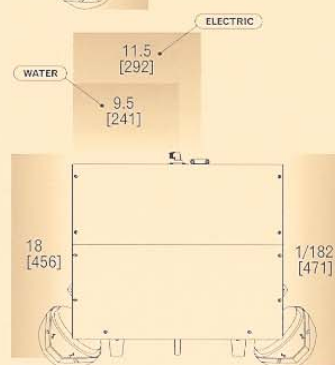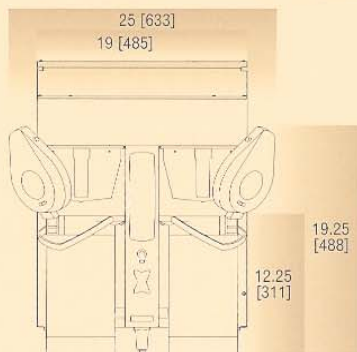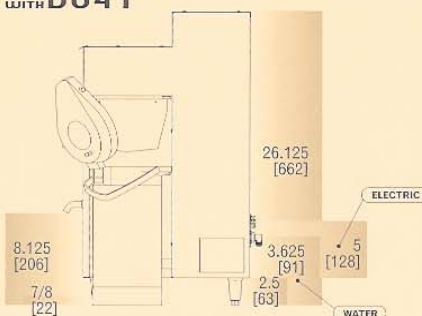

Electrical Configurations

Model	Configuration Code	Heater Conf. WATT	Voltage AC	Phase	Wires	KW	Maximum Amp. Draw	Batches per hour ⁽¹⁾ 3.0 Liters per Batch	
Cold Water									
Hot Water									
U S & C A N A D A									
2031e	E31045 Can be connected to 120 VAC or 120/208-240 VAC	1 x 1500	120	1	2+ground	1.6	13.0	4.9	11.0
		2 x 1500	120/208	1	3+ground	2.4	11.3	7.3	11.0
			120/220	2.6		12.0	8.2	11.0	
			120/240	3.1		13.0	9.7	11.0	
	E31035 Can be connected to 120 VAC or 120/208-240 VAC	1 x 1700	120	1	2+ground	1.8	14.7	5.5	11.0
		2 x 1700	120/208	1	3+ground	2.7	12.8	8.3	11.0
			120/220	3.0		13.5	9.2	11.0	
			120/240	3.5		14.7	11.0	11.0	
	E31015 Can be connected to 120 VAC or 120/208-240 VAC	1 x 2300	120	1	2+ground	2.4	19.7	7.4	11.0
		2 x 2300	120/208	1	3+ground	3.6	17.1	11.0	11.0
			120/220	4.1		18.1	11.0	11.0	
			120/240	4.7		19.7	11.0	11.0	
2032e	E32015	2 x 3000	120/208	1	3+ground	4.6	22.4	14.6	22.0
			120/220			5.1	23.7	16.9	22.0
			120/240			6.1	25.8	19.4	22.0
E X P O R T									
2031e	E41026	1 x 3000	220	1	2+ground	2.6	12.0	8.4	11.0
2032e	E42026	2 x 3000	220	1	2+ground	5.1	23.7	16.9	22.0

¹ Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.

Specifications / Water Configurations

Model	Height inch [mm]	Width inch [mm]	Depth inch [mm]	Brewer Empty lbs [kg]	Water Pressure psig	Flow Rate gpm	Water Inlet inch	Weight lbs [kg]	Height inch [mm]	Width inch [mm]	Depth inch [mm]
CBS-2031	26.2 [665]	11 [275]	17.9 [455]	55.1 [25]	20-75	0.25	3/8 male	38 [17]	26 [660]	14 [350]	22 [550]
CBS-2032	26.2 [665]	19 [485]	18 [457]	92.6 [42]	20-75	0.5	3/8 male	59 [27]	26 [660]	24 [600]	22 [550]

Shipping

Optional Features

Z005 ▶ Color Coded Faucet Handles

Paper Filters

F002 ▶ 13" x 5" Paper Filters
(500 Per Case)

Accessories

- A015 ▶ Round Drip Tray
- A034 ▶ 2 Station Airpot Rack
- A035 ▶ 3 Station Airpot Rack
- A036 ▶ 5 Station Airpot Rack
- A039 ▶ In Line Water Filter w/Cartridge
- A075 ▶ Replacement Filter Cartridge
- A092 ▶ Single Serving Stand for L3S-10 (S3S-10-1)
- A094 ▶ Twin Serving Stand for L3S-10 (S3S-10-2)
- A096 ▶ Triple Serving Stand for L3S-10 (S3S-10-3)

Patents

6,148,717 & 6,565,906 & 6,576,282

Other patents pending.


Approvals



CBS-2018

Drawing

CBS-2018 WITH D037

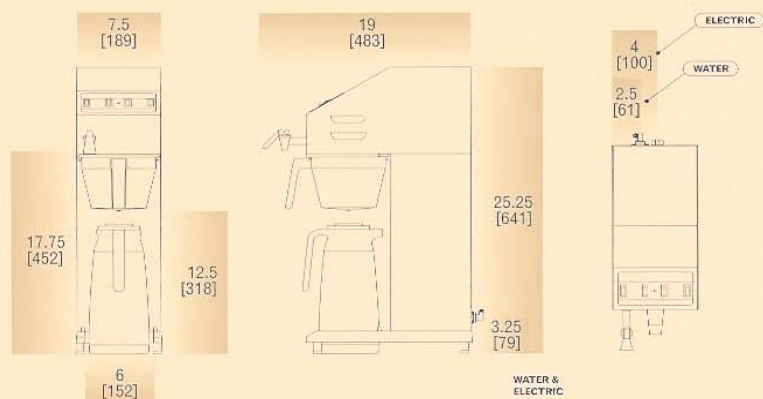

Electrical Configurations

Configuration Code	Heater Conf. WATT	Voltage AC	Phase	Wires	KW	Maximum Amp. Draw	Batches per hour ⁽¹⁾	
							1.5 Liter Batch	1.8 Liter Batch
US & CANADA								
E15015 (1.5 ltr)	1 x 1500	120	1	2+ground	1.6	13.0	6.3	5.4
E18015 (1.8 ltr)								
E15025 (1.5 ltr)	1 x 2100	120	1	2+ground	2.2	18.0	7.9	6.8
E18025 (1.8 ltr)								
E15035 (1.5 ltr)	1 x 2700	120/208	1	3+ground	2.1	10.2	7.7	6.7
E18035 (1.8 ltr)								
		120/220	1	3+ground	2.4	11.2	8.4	7.4
		120/240	1	3+ground	2.8	11.8	9.1	8.0
E15055 (1.5 ltr)	1 x 3700	120/208	1	3+ground	2.9	13.8	9.2	8.2
E18055 (1.8 ltr)								
		120/220	1	3+ground	3.3	15.1	10.0	8.9
		120/240	1	3+ground	3.8	15.9	10.7	9.6
EXPORT								
E15045 (1.5 ltr)	1 x 2700	220	1	2+ground	2.4	11.2	8.4	7.4
E18045 (1.8 ltr)								
E15065 (1.5 ltr)	1 x 3700	220	1	2+ground	3.3	15.1	10.0	8.9
E18065 (1.8 ltr)								

1. Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.

Specifications / Water Configurations

Height inch [mm]	Width inch [mm]	Depth inch [mm]	Brewer Empty lbs [kg]	Dispenser Empty lbs [kg]	Dispenser Filled lbs [kg]	Water Tank g [l]	Water Pressure psig	Flow Rate gpm	Water Inlet inch
25.3 [600]	7.5 [190]	19 [485]	21 [9.5]	2 [0.9]	5.9 [2.7]	2.0 [1.8]	20-75	1/2	1/4

Shipping

Weight lbs [kg]	Height inch [mm]	Width inch [mm]	Depth inch [mm]
24 [10.8]	26 [660]	8 [285]	20 [505]

Paper Filters

F007 ▶ 11 1/4" x 3 3/4" Paper Filters
(500 Per Case)

Accessories


A074 ▶ Adapter Ring for Bowl Servers

Patents

6,148,717 & 6,565,906 & 6,576,282
Other patents pending.

Approvals





FETCO CORPORATION

640 Heathrow Drive, Lincolnshire
IL 60069-4205, USA

Toll-free: 1-800-FETCO 99 (800-338-2699)

www.FETCO.com
sales@FETCO.com

FETCO® is an active member of these organizations:



FETCO, LUXUS, EXTRACTOR, THE EXTRACTOR and Design, DRIVEN TO PIONEER INNOVATION, DRIVEN TO PIONEER INNOVATION and Design, PULSE-BREW, the "T" shape of the brewers, the "I" shape of the brewers are all trademarks or registered trademarks of Food Equipment Technologies Company. FETCO asserts all applicable rights in the product design and trade dress of its products. All other trademarks or trade names are trademarks or trade names of their respective owners.

Specifications to change without notice.

Printed in USA 2004.