



AIRPOT COFFEE BREWING SYSTEM

CBS 2130 TOUCHSCREEN SERIES



CBS-2132XTS-3L
Dual Station Brewer*

CBS-2131XTS-3L
Single Station Brewer*

* Shown with #D041 Airpot dispenser (sold separately)

The 3 Liter and 1 Gallon CBS-2131 / 2132 XTS Touchscreen Series Airpot Coffee Brewers are a perfect hot beverage solution for high volume self-service environments such as convenience stores, cafeterias, specialty coffee shops or office coffee service (OCS). Now experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



CBS-2132XTS-1G
Dual Station Brewer*

CBS-2131XTS-1G
Single Station Brewer*

* Shown with #D063 Airpot dispenser (sold separately)

Perfect taste begins with a simple touch...

User Friendly Touchscreen

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data to provide instant visual feedback at any point during programming, diagnostics or the brew cycle.




Streamlined Programming, Diagnostics and Metrics

The Extractor® Touchscreen Operating System (ETOS) was engineered for quick and efficient navigation through set-up, programming, diagnostics and daily operational brewing modes.



Customizable Screens

Customize the start screen to tie your equipment and product offerings into a consistent brand message. You can also create and display individual recipe names for quick and easy access to your most used coffee blends.

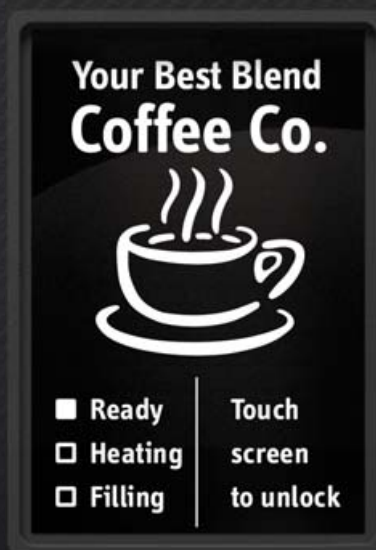


XTS™ Series

Driven by a user friendly touchscreen interface and intuitive software, the XTS series represents the next step in the evolution of FETCO's renown EXTRACTOR brewing technology.



Cascading Spray Dome®

Hot tank water flows through clog-free channels built into the dome and virtually eliminates spray head scale buildup – a leading reason for service calls.

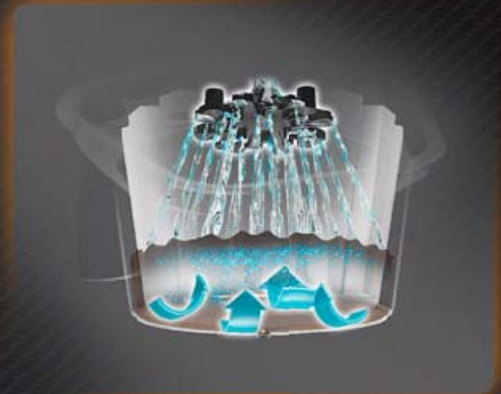

Legendary Extractor® Control

Although designed specifically for smaller batch airpot dispensing, these high quality brewers possess the legendary features and reliable performance you've come to expect from Extractor® branded products.



Contemporary Design

Sleek European cabinet design is attractive and fits well in any front-of-house decor found in cafes, lounges, OCS or corporate breakrooms.



Modern Convenience

Duplicate profiles and parameters to and from any of the batch buttons on a single machine or copy the information to an unlimited number of brewers via a removable SD card (Sold separately).



Airpot Dispensing

Designed for flexibility and portability, vacuum lined pump lever airpots quickly turn virtually any remote location into a hot and fresh beverage service station.



Vacuum Lined
Stainless Steel Airpot

Water Specification

Water Connection Inlet 1/4" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	--	--

Electrical Configuration

PLASTIC BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213153	1 x 1.5 kW	100-120	1	2+G	1.1-1.6	NEMA 5-15P	10.9-13.0	3.9 [14.8] ⁽¹⁾
E213154	1 x 1.7 kW	100-120	1	2+G	1.3-1.8	NEMA 5-15P	12.3-14.7	4.4 [16.7] ⁽¹⁾
E213151	1 x 2.3 kW	100-120	1	2+G	1.7-2.4	NEMA 5-20P	16.5-19.7	5.8 [22.0] ⁽¹⁾
E213157	1 x 3.0 kW	200-240	1	2+G	2.2-3.1	Cord / No Plug	10.9-13.0	7.7 [29.1] ⁽¹⁾

STAINLESS STEEL BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213153M	1 x 1.5 kW	100-120	1	2+G	1.1-1.6	NEMA 5-15P	10.9-13.0	3.9 [14.8] ⁽¹⁾
E213154M	1 x 1.7 kW	100-120	1	2+G	1.3-1.8	NEMA 5-15P	12.3-14.7	4.4 [16.7] ⁽¹⁾
E213151M	1 x 2.3 kW	100-120	1	2+G	1.7-2.4	NEMA 5-20P	16.5-19.7	5.8 [22.0] ⁽¹⁾
E213157M	1 x 3.0 kW	200-240	1	2+G	2.2-3.1	Cord / No Plug	10.9-13.0	7.7 [29.1] ⁽¹⁾


(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water.

Measurements


Height 25 3/4" [65.5 cm]	Width 11 3/4" [30.3 cm]	Depth 20 3/8" [51.6 cm]	Empty Weight 29 lbs [13 kg]	Filled Weight 55 lbs [25 kg]	Combined Filled Weight 66 lbs [34 kg] BREWER + 1 FILLED D041 DISPENSER	Hot Water Tank Cap. 3.3 gal [12.4 l]	Shipping Weight: 41 lbs [18 kg]	Shipping Dimensions: 16" x 23" x 29" [40.6x58.4x73.7 cm]
--------------------------------	-------------------------------	-------------------------------	-----------------------------------	------------------------------------	--	--	---------------------------------------	--

Dimensional Views


SIDE VIEW

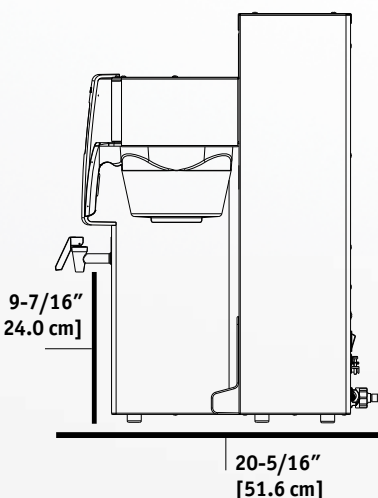


FRONT VIEW

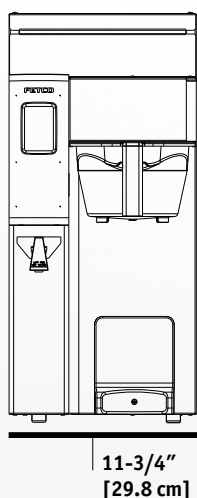

BACK VIEW

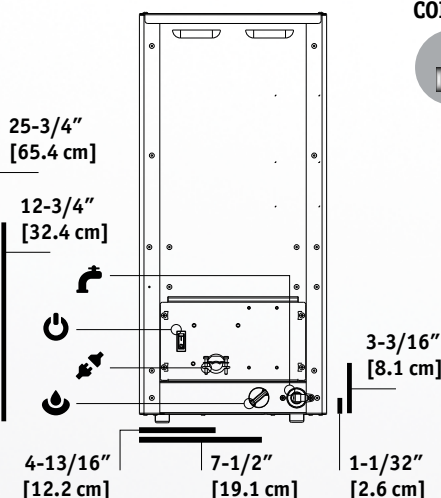


NEMA PLUGS CONFIGURATIONS



SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	123
12oz.	82
16oz.	62
20oz.	49

Compatible Dispensers

#D041
3.0L Thermal Pump
Lever Airpot

Product DIMS:
Height: 14 1/2" [36.8 cm]
Width: 7" [17.8 cm]
Depth: 9" [22.9 cm]
Weight:
Empty: 4.6 lbs [2.1 kg]
Filled: 11.1 lbs [5.1 kg]



Paper Coffee Filters

#F002
13" x 5" Paper Coffee Filter



Brew Baskets

#B007218B1
13" x 5"
Stainless Steel



#B014218BN2
13" x 5"
Plastic w/ Brown Insert



* Approximate based on maximum power setting.



Water Specification

Water Connection Inlet 1/4" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	--	--



Electrical Configuration

PLASTIC BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213251	2 x 2.3 kW	200-240	1	2+G	3.3-4.7	Hardwired	16.5-19.7	11.5 [43.5] ⁽¹⁾
E213252	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾

STAINLESS STEEL BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213251M	2 x 2.3 kW	200-240	1	2+G	3.3-4.7	Hardwired	16.5-19.7	11.5 [43.5] ⁽¹⁾
E213252M	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water.




Measurements

Height 25 3/4" [65.5 cm]	Width 19 3/4" [50.2 cm]	Depth 20 3/8" [51.8 cm]	Empty Weight 47 lbs [21 kg]	Filled Weight 92 lbs [41 kg]	Combined Filled Weight 114.4 lbs [51 kg] BREWERS + 2 FILLED D041 DISPENSERS	Hot Water Tank Cap. 5.8 gal [22.1 l]	Shipping Weight: 58 lbs [26 kg]	Shipping Dimensions: 23" x 25" x 29" [58.4x63.5x73.7 cm]
--------------------------------	-------------------------------	-------------------------------	-----------------------------------	------------------------------------	---	--	---------------------------------------	--




Dimensional Views


SIDE VIEW

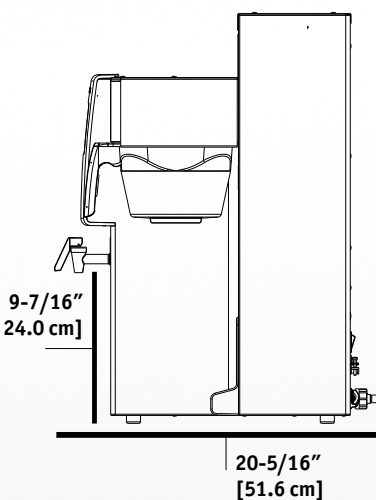

FRONT VIEW

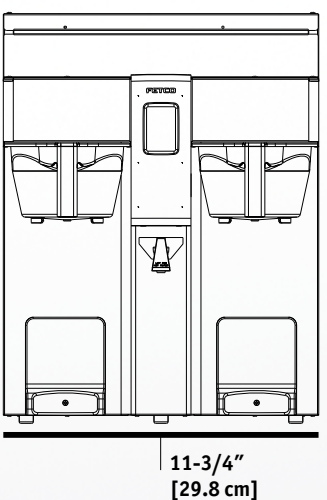


BACK VIEW

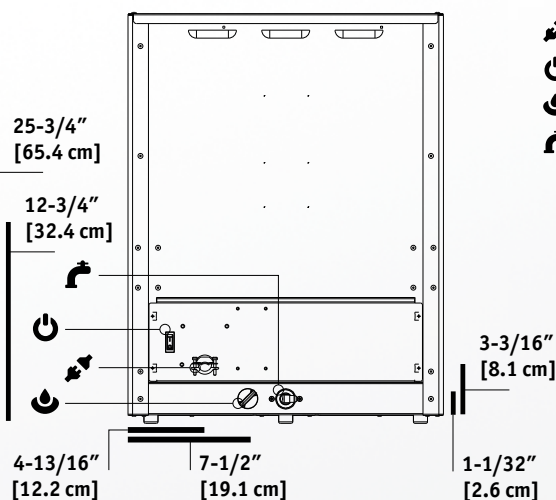

SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	224
12oz.	149
16oz.	112
20oz.	90



Compatible Dispensers

#D041
3.0L Thermal Pump
Lever Airpot

Product DIMS:
Height: 14 1/2" [36.8 cm]
Width: 7" [17.8 cm]
Depth: 9" [22.9 cm]
Weight:
Empty: 4.6 lbs [2.1 kg]
Filled: 11.1 lbs [5.1 kg]



Paper Coffee Filters

#F002
13" x 5" Paper Coffee Filter



Brew Baskets

#B007218B1
13" x 5"
Stainless Steel



#B014218BN2
13" x 5"
Plastic w/ Brown Insert



* Approximate based on maximum power setting.

Water Specification

Water Connection Inlet 1/4" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	--	--

Electrical Configuration

PLASTIC BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213152	1 x 2.3 kW	100-120	1	2+G	1.7-2.4	NEMA 5-20P	16.5-19.7	5.8 [22.0] ⁽¹⁾
E213158	1 x 3.0 kW	200-240	1	2+G	3.3-4.7	Cord / No Plug	16.5-19.7	11.5 [43.5] ⁽¹⁾

STAINLESS STEEL BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213152M	1 x 2.3 kW	100-120	1	2+G	1.7-2.4	NEMA 5-20P	16.5-19.7	5.8 [22.0] ⁽¹⁾
E213158M	1 x 3.0 kW	200-240	1	2+G	2.2-3.1	Cord / No Plug	10.9-13.0	7.7 [29.1] ⁽¹⁾


(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water.

Measurements


Height 27 3/4" [70.5 cm]	Width 11 3/4" [30.3 cm]	Depth 20 3/8" [51.6 cm]	Empty Weight 29 lbs [13 kg]	Filled Weight 55 lbs [25 kg]	Combined Filled Weight 66 lbs [35 kg] <small>BREWER + 1 FILLED D063 DISPENSER</small>	Hot Water Tank Cap. 3.3 gal [12.4 l]	Shipping Weight: 41 lbs [18 kg]	Shipping Dimensions: 16" x 23" x 29" [40.6x58.4x73.7 cm]
--------------------------------	-------------------------------	-------------------------------	-----------------------------------	------------------------------------	---	--	---------------------------------------	--

Dimensional Views


SIDE VIEW

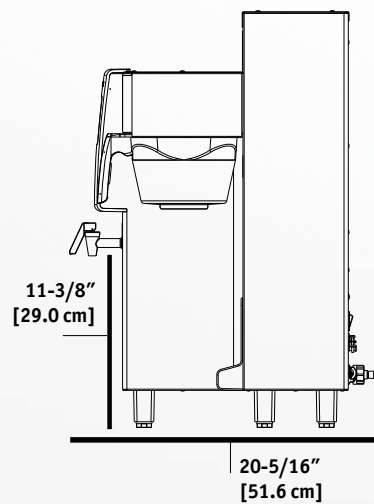


FRONT VIEW

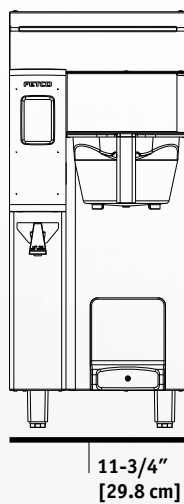

BACK VIEW

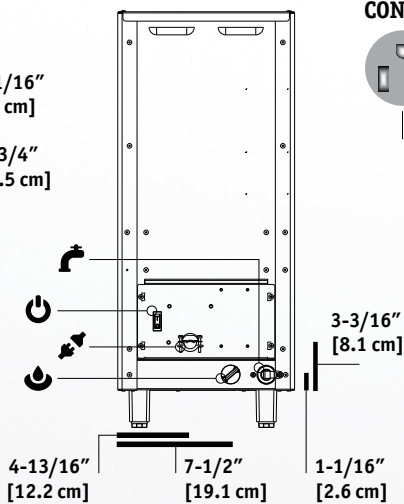


NEMA PLUGS CONFIGURATIONS



SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	123
12oz.	82
16oz.	62
20oz.	49

Compatible Dispensers

#D063
1G Thermal Pump
Lever Airpot

Product DIMS:
Height: 16 1/2" [47 cm]
Width: 7" [17.8 cm]
Depth: 9" [22.9 cm]
Weight:
Empty: 9 lbs [4.1 kg]
Filled: 13.3 lbs [6 kg]



Paper Coffee Filters

#F002
13" x 5" Paper Coffee Filter



Brew Baskets

#B007218B1
13" x 5"
Stainless Steel



#B014218BN2
13" x 5"
Plastic w/ Brown Insert



* Approximate based on maximum power setting.



Water Specification

Water Connection Inlet 1/4" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	--	--



Electrical Configuration

PLASTIC BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213253	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾

STAINLESS STEEL BREW BASKET CONFIGURATION

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213253M	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water.




Measurements

Height	Width	Depth	Empty Weight	Filled Weight	Combined Filled Weight	Hot Water Tank Cap.	Shipping Weight:	Shipping Dimensions:
27 3/4" [70.5 cm]	19 3/4" [50.2 cm]	20 3/8" [51.8 cm]	47 lbs [21 kg]	92 lbs [42 kg]	115 lbs [52 kg] BREWER + 2 FILLED D063 DISPENSERS	5.8 gal [22.1 l]	58 lbs [26 kg]	23" x 25" x 29" [58.4 x 63.5 x 73.7 cm]




Dimensional Views


SIDE VIEW

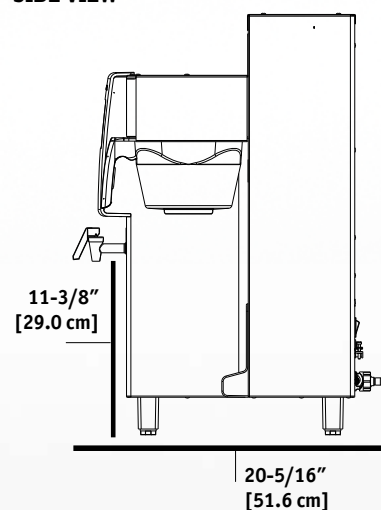

FRONT VIEW

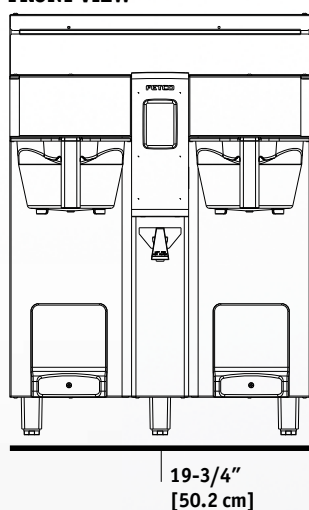


BACK VIEW

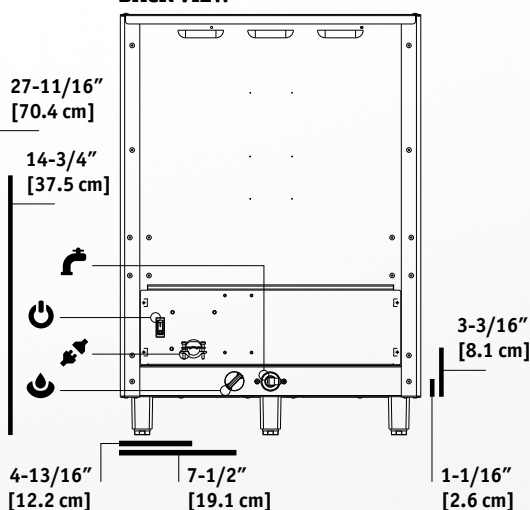

SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	224
12oz.	149
16oz.	112
20oz.	90



Compatible Dispensers

#D063
1G Thermal Pump
Lever Airpot

Product DIMS:
Height: 16 1/2" [47 cm]
Width: 7" [17.8 cm]
Depth: 9" [22.9 cm]
Weight:
Empty: 9 lbs [4.1 kg]
Filled: 13.3 lbs [6 kg]



Paper Coffee Filters

#F002
13" x 5" Paper Coffee Filter



Brew Baskets

#B007218B1
13" x 5"
Stainless Steel



#B014218BN2
13" x 5"
Plastic w/ Brown Insert



* Approximate based on maximum power setting.

Features & Benefits



	Feature	Benefit
1	Touchscreen Interface	Allows for quick and easy access to brew controls.
2	Brew Basket Sensors	Automatically discontinues operation of brew cycle if basket is removed.
3	Mixed Material Construction	Mixed material is attractive and comfortable in any front-of-house setting.
4	Manual Water Faucet	Safely dispenses hot water away from steam and brew basket.
5	Stainless Steel Finish	Withstands the harshest foodservice environments and is durable and easy to clean.
6	Fixed Dispenser Guide	Helps position airpot directly under brew basket drip hole for spill free brewing.



Dispensers sold separately.

FETCO

© Copyright 2013 FETCO®, Driven to Innovation™
is a mark of Food Equipment Technologies Company.

 fetco.com

SS14002.2

 847.719.3000
1.800.338.2699 USA
 847.719.3001

 Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA