

Twin 2.0 Gallon Thermal Coffee Brewing System

CBS-52H20

CBS 5000
S E R I E S

The Ultimate Coffee Machine.

Your Answer to Brewing The Best Tasting Coffee Consistently Day After Day...

Developed with proprietary designs and technologies, FETCO equipment ensures safety and integrity of each brew with innovative designs such as:



- Dual Brew Basket Safety Locks Incorporated Into Start Switch



- Stainless Steel Gourmet Size Brew Baskets Designed For Heavier Brew Ratios



- Brewing Directly Into Our Patented Luxus Dispensers To Ensure A Continuous Flow of Hot, Aromatic, Great Tasting Coffee

Fetco Brewers Utilize The Most Recent Technological Advances In Coffee Brewing In Order To:

- Hold A Constant Water Temperature During 100% Of Brew Cycle
- Maintain Sprayover Volume Consistency
- Resist Lime Buildup Inside Dispense Tube System
- Utilize All Solid State Components



The LUXUS Thermal Dispenser
Totally portable, requires no electric power.

Once filled and capped, it goes anywhere... Ready To Act As Your Remote Dispensing Station Wherever Needed

You can prepare them ahead of time and place them where you want them. It is important to note that the LUXUS thermal dispenser can be staff-operated or used as a self-service system



CBS-52H20 in Stainless Steel finish and with 2.0 Gallon LUXUS Dispensers

FETCO
CORPORATION

CBS-52H20

Standard Features:

2.0 Gal. Thermal, All Stainless Steel Lined Beverage Dispensers
Stainless Steel, Gourmet Size Brew Baskets
Brew Basket Safety Locks
Open Type, Leak Free Dispense System
Fully Automatic With Electronic Temperature Control
Mercury-Type Power Contactor
Two-Level Water Tank Drain System
Total Serviceability From The Front


Optional Features:

Half Batch Brewing Capability
Iced Tea Brewing Capability
Color Stainless Steel Finish
Custom & Export Voltage

Accessories:

2.0 Gallon Luxus Dispensers
Single, Dual & Triple Serving Stations
(for Luxus Server LS Models Only)
Brewing Stand For Luxus Server LS Models

Dimensions & Specifications

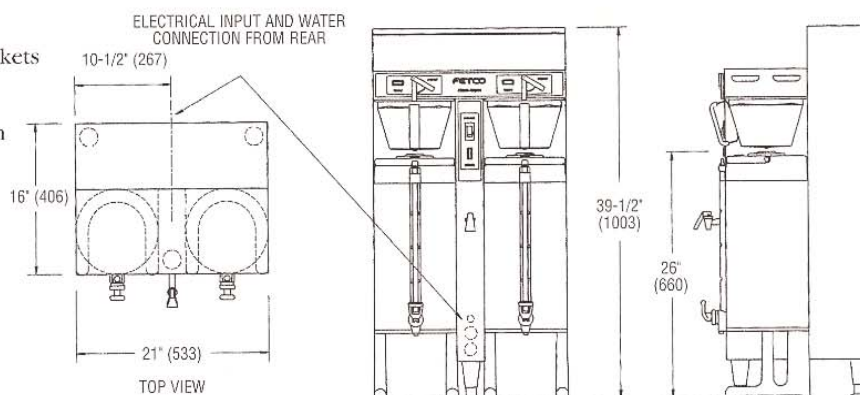

Water Requirements: 20-75 psig, 1-1/4 gpm flow rate. Water inlet is 3/8 Male Flare

Standard Electrical Configurations & Brewing Efficiency

Electrical Config. Code	Heater Configuration	Voltage	Phase	Wires	KW	Maximum Amp draw	Brews per Hour	
							Cold Water	Hot Water
CBS-52H20-1	2 x 3000 watt	120/208	1 ph.	3 + ground	4.6	22.4	5.8	9.9
		120/220	1 ph.	3 + ground	5.2	23.7	6.5	11.0
		120/240	1 ph.	3 + ground	6.1	25.8	7.6	13.1
CBS-52H20-2	2 x 4000 watt	120/208	1 ph.	3 + ground	6.1	29.6	7.6	13.1
		120/220	1 ph.	3 + ground	6.8	31.3	8.6	14.7
		120/240	1 ph.	3 + ground	8.1	34.1	10.2	15.0
CBS-52H20-3	3 x 3000 watt	120/208	3 ph.	4 + ground	6.9	19.5	8.6	14.8
		120/220	3 ph.	4 + ground	7.7	20.5	9.7	15.0
		120/240	3 ph.	4 + ground	9.1	22.4	11.6	15.0
CBS-52H20-4	3 x 4000 watt	120/208	3 ph.	4 + ground	9.1	25.8	11.6	15.0
		120/220	3 ph.	4 + ground	10.3	27.3	12.9	15.0
		120/240	3 ph.	4 + ground	12.1	29.7	15.0	15.0

Weights & Capacities

MODEL	HEIGHT	WIDTH	DEPTH	BREWER EMPTY	BREWER FILLED	DISPENSER EMPTY	DISPENSER FILLED	BREWER & DISP FILLED	WATER TANK	DISPENSER	SHIPPING WEIGHT	CU. FT.
	in/mm	in/mm	in/mm	lbs/kg	lbs/kg	lbs/kg	lbs/kg	lbs/kg	gal/l	gal/l	lbs/kg	ft/cu dec
CBS 52H20	39.5/1003	21/533	16/406	87/39.5	150/68.0	10.0/4.5	26.6/12.1	203.2/92.2	7.6/28.72	2.0/7.6	127/58.0	11.8/334

Patents & Approvals:

U.S. Pat. Nos. 5,000,082; 5,331,885. Other patents pending. LUXUS is a registered U. S. Trademark No.: 1797027



FETCO Corporation is a proud and active member of these organizations:



FETCO
CORPORATION

Food Equipment Technologies Company, Inc.
640 Heathrow Drive, Lincolnshire, IL 60069 USA
Phone: 847.821.1177 800-FETCO 99 Fax: 847.821.1178
Internet: www.fetco.com E-mail: sales@fetco.com